


# SecurEdge 400™ Gutter

ANSI/SPRI GD-1 CERTIFIED:

.040" Aluminum  
 G-1 Horizontal = 210 psf  
 G-2 Vertical = 90 psf  
 G-3 Static = 290 psf

24GA Steel  
 G-1 Horizontal = 200 psf  
 G-2 Vertical = 90 psf  
 G-3 Static = 280 psf

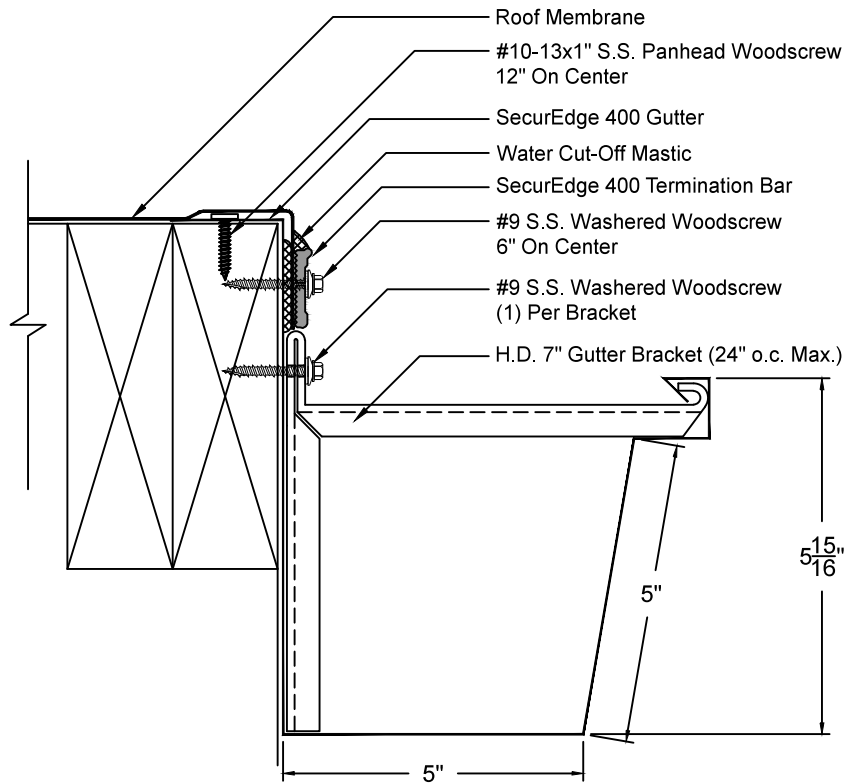

- Gutter Bracket and fasteners provided.
- Term Bar and fasteners NOT provided.

## QUANTITIES:

Lineal Feet (10'-0" Lengths\*): \_\_\_\_\_

Outside Miters\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

Inside Miters\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

Right End Caps\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

Left End Caps\*\* : \_\_\_\_\_  Optional Welded (Surcharge Applies)

\* Optional lengths available up to 20'-0"

\*\* Standard riveted

## PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Carlisle's printed instructions.

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE:



P: (800) 479-6832 , F: (717) 245-7053 , www.carlislemetalproducts.com

## MATERIAL:

24GA  .040" AL

Other: \_\_\_\_\_

Finish: \_\_\_\_\_

Color: \_\_\_\_\_

Effective Date: 6-1-13

Drawn By: J.S.

Approved By: K.L.